


UNLESS OTHERWISE STATED, PLEASE DO NOT TIGHTEN BOLTS (AND/OR) SCREWS UNTIL UNIT IS COMPLETELY ASSEMBLED. Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly required. Online Parts Request Form: www.hillsdalehouse.com/parts_request.html

HARDWARE LIST


- A (6) Medium Allen Bolts
- B (18) Spring Washers
- C (10) Flat Metal Washers
- D (12) Short Allen Bolts
- E (4) Long Allen Bolts
- F (12) Camber Washers
- G (4) Wood Screws
- H (1) Allen Wrench

PARTS LIST

- J (1) Back
- K (1) Seat
- L (1) Seat Base
- M (1) Ring Guard
- N (1) Upper Legs
- O (1) Top Ring
- P (1) Lower Legs
- Q (1) Bottom Ring

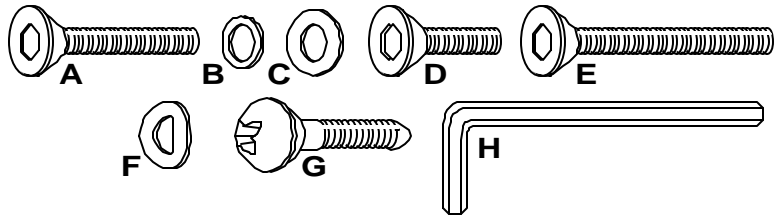

**Tools Required: Allen Wrench (Included)
Phillips Screwdriver (not included)**

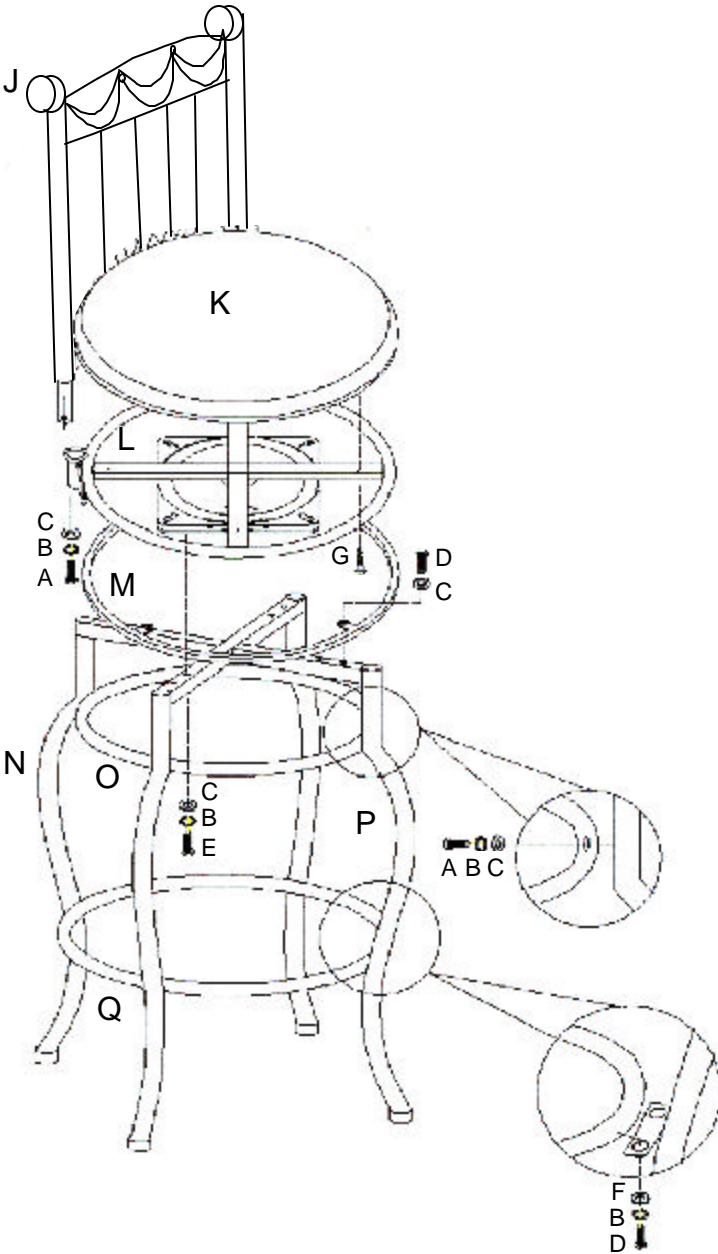

STEP ONE

Assemble together both Upper and Lower Legs (N & P) as shown.

STEP TWO

Secure upper portion of assembled leg sections using Top Ring (O), 8 Medium Allen Bolts (A), (8) Spring Washers (C) and (8) Large Metal Washers (B). Only hand tighten bolts at this time.

STEP THREE

Secure bottom portion of assembled leg sections using Bottom Ring (Q), 8 Short Allen Bolts (D), (8) Spring Washers (B) and (8) Camber Washers (F). Only hand tighten bolts at this time.

STEP FOUR

Secure the very top of the assembled legs using 1 Ring Guard (M), 4 Short Allen Bolts (D) and 4 Flat Metal Washers (C). Next, tighten all bolts from Steps two - four. Do not over tighten.

STEP FIVE

Secure Seat Base (K) to top of assembled leg section as shown using 4 Long Allen Bolts (E), 4 Spring Washers (B) and 4 Metal Washers (C). Tighten all bolts.

STEP SIX

Attach Seat (K) to top of Seat Base (L) using 4 Wood Screws (G). Tighten all screws. Do not over tighten.

STEP SEVEN

Attach Back (J) to Seat Base (L) using 2 Medium Allen Bolts (A), 2 Spring Washers (C) and 2 Large Metal Washers (B). Tighten all bolts. Do not over tighten.

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.